

KEY FEATURES

- ❖ Fully supports two unsynchronized base Camera Link™ cameras/frame grabbers
- ❖ Provides 4Gb/s transport bandwidth - 24b/p and pixel clock rate up to 66MHz for each camera (85MHz optional)
- ❖ Zero loss and transparent transport – no changes required for camera and/or frame grabber
- ❖ Two LC duplex fiber interface
- ❖ 8 opto-isolated GPIO channels (4 inputs and 4 outputs) for external trigger and control
- ❖ Two full duplex RS232 for remote instrument control
- ❖ Single 5V~24V DC power supply
- ❖ Locking AC/DC power adapter
- ❖ Transmission distance depending on your choice of fiber:
 - Multi-mode fiber – up to 250m
 - Single-mode fiber – up to 50km

APPLICATIONS

- ❖ High precision security surveillance (e.g. border control, airport)
- ❖ Bar code reading and sorting (e.g. postal center, packaging)
- ❖ Vehicle license plate reading/recording (e.g. toll booth)
- ❖ Product inspection (e.g. automated production line)
- ❖ Port/Harbor cargo container management
- ❖ Railroad measurement/inspection
- ❖ Traffic surveillance/control
- ❖ Cameras placed in harsh environment (e.g. nuclear plant)
- ❖ Long haul image transmissions (e.g. bridge inspection)
- ❖ Other Machine Vision Applications

PHRONTIER™
TECHNOLOGIES

PHOX™ Camera Link Fiber Extender




Dual Base Configuration

PHOX-B2M-250
PHOX-B2L-10/20/40/50






Phrontier Technologies, LLC
www.phrontier-tech.com
sales@phrontier-tech.com
Toll Free: 1-866-389-2829
Fax: 1-801-998-1855

SYSTEM FLEXIBILITY

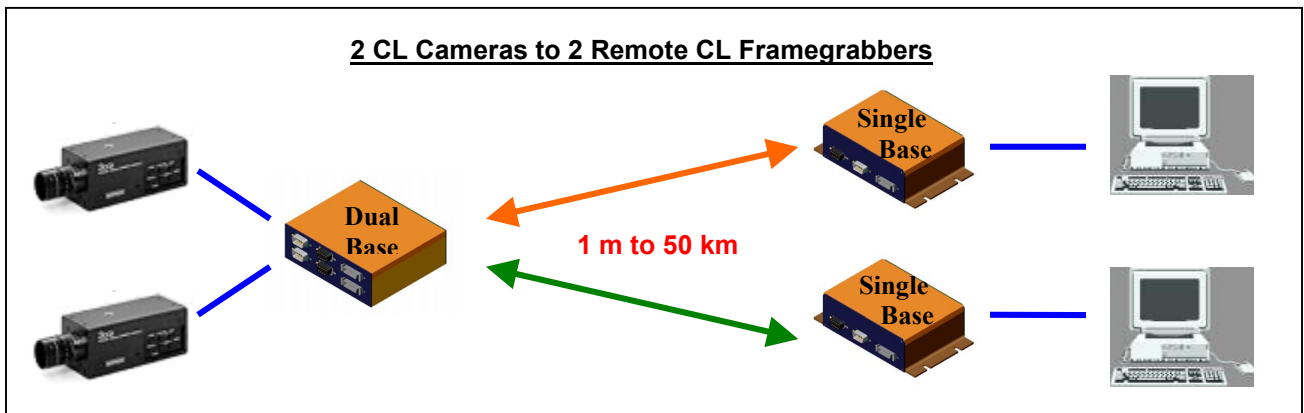
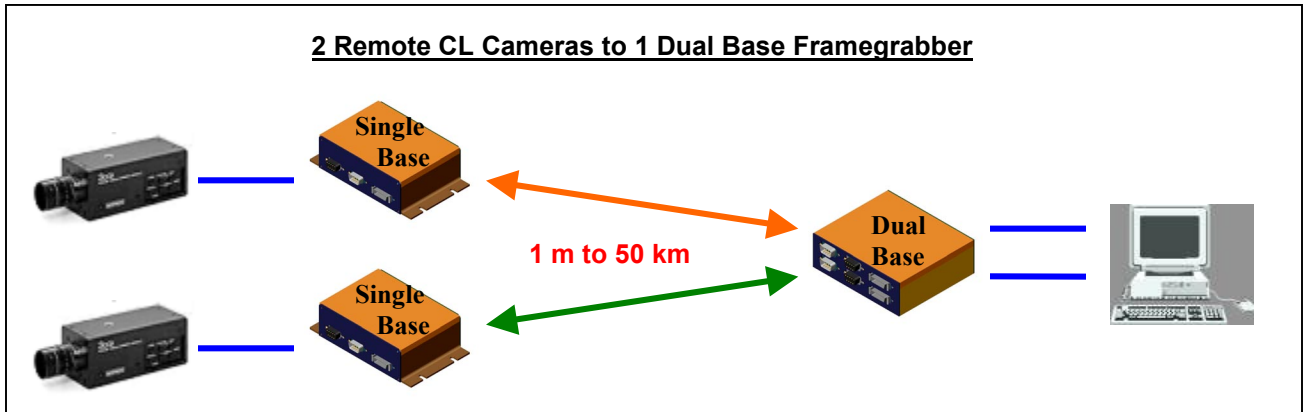
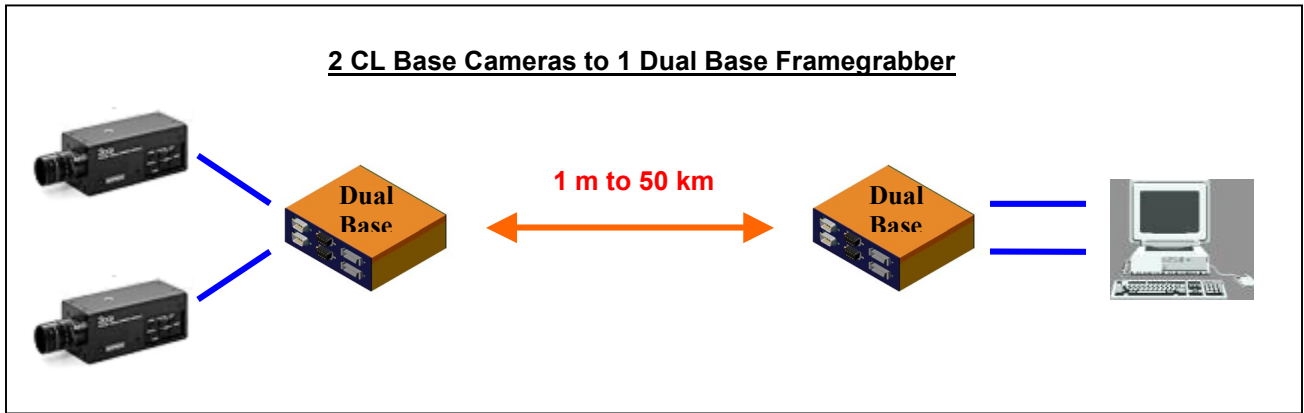


MECHANICAL INFORMATION (mm)

Option 1 – without mounting wings

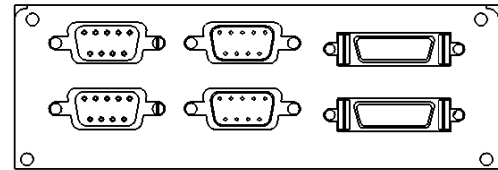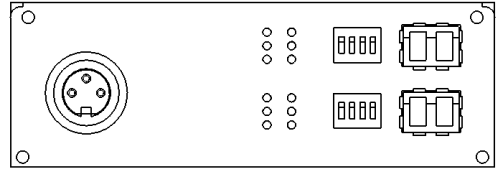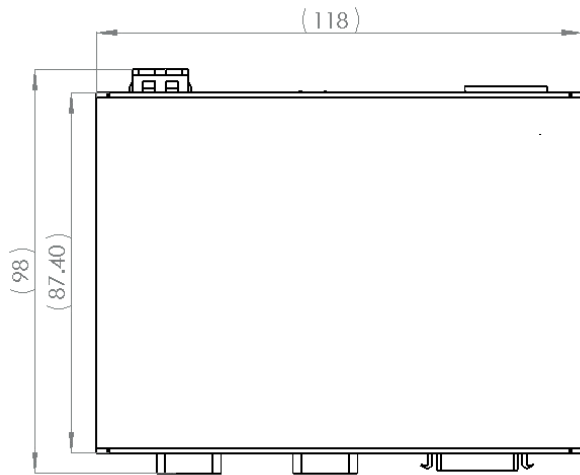

Option 2 – with mounting wings

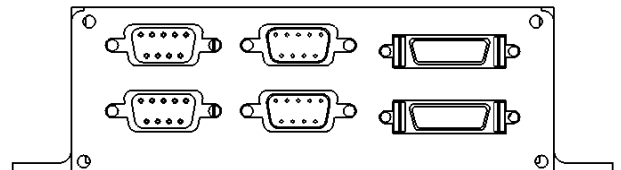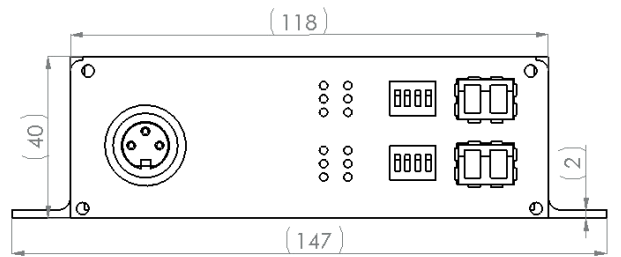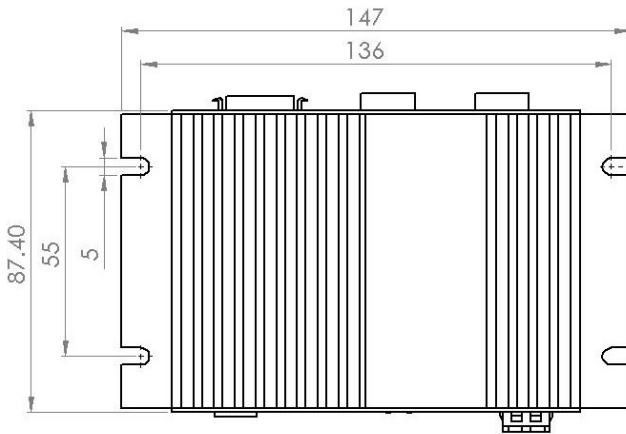

ORDERING INFORMATION

Model #	Transport Distance	Check List
PHOX-B2M-250	Up to 250 meters*	1x PHOX-CM 1x PHOX-FG 4x DB9 M/F RS232 cable (6ft)
PHOX-B2L-xx	Up to 50 kilometers*	2x 12DC international wall mount AC/DC power adapters with locking plug (LC duplex fiber cable not included)

- Note: xx = Maximum transporting distance in kilometers. Available in 10KM, 20KM, 40KM, and 50KM.
- * Distance depending on fiber type and system design. 250 m transmission distance for PHOX-B2M is based on 50/125 MM fiber. Extra optical losses in the system will reduce the maximum transmission distance.