

# PHORCE (standalone version)

## PRODUCT BRIEF

The PHORCE product family is designed to extend the SuperSpeed USB3.0 connections beyond the typical 3 meter reach of copper cables. The standalone version of PHORCE consists of two individual modules. A PC module directly connects to any USB3.0 port on a host such as a PC. A separate RE module (remote module) connects to user's USB 3.0 devices such as a camera, external hard drive, control panel, or any other USB3.0 compatible devices. By placing an optical fiber between the PC and RE modules, the PHORCE system can achieve a 300m link distance with a choice of SM or MM fibers. By incorporating swappable optical transceivers, PHORCE can be deployed to any existing fiber networks without opening walls or digging trenches.

## KEY FEATURES

- ❖ Provide 5Gb/s transmission bandwidth
- ❖ Supports any USB3.0 device connection but not backward compatible with USB2.0
- ❖ Compatible with MM, SM fibers and CWDM technologies
- ❖ Available for one fiber solution (LC simplex)
- ❖ Plug and Play, no drivers required
- ❖ LED indicators for system status
- ❖ Low power consumption ~2W while operating
- ❖ Provide USB bus power for USB devices
- ❖ Secure power connector with locking mechanism
- ❖ Secure USB connectors with thumbscrew locking mechanism
- ❖ Secure installation with mounting wings
- ❖ Provide optical isolation
- ❖ Compact size

## APPLICATIONS

- ❖ Long distance USB3.0 accessories connections
- ❖ USB3Vision applications
- ❖ Machine vision applications
- ❖ Intelligent traffic control systems
- ❖ Security surveillance systems
- ❖ Remote data storage systems
- ❖ Automation inspection systems
- ❖ High resolution images and real-time analysis for science, sports and automobile tests

**PHRONTIER**<sup>TM</sup>  
TECHNOLOGIES


## PHORCE

### USB 3.0 Optical Fiber Extender

PHU30-M  
PHU30-S  
PHU30-SL  
PHU-Cxx



## TYPICAL SET UP DIAGRAM

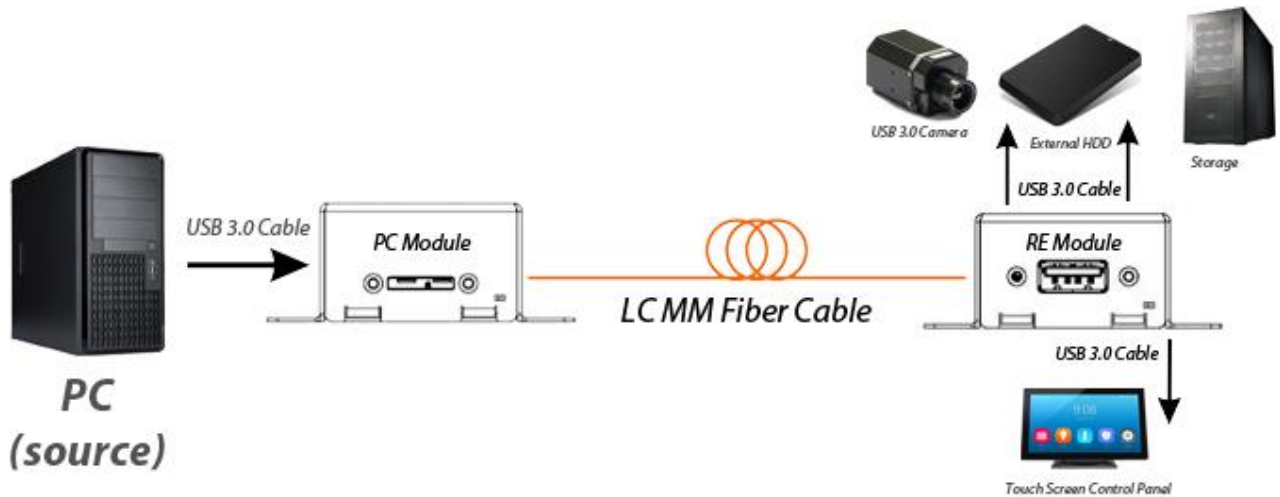

## TECHNICAL SPECIFICATIONS

### Module Specifications

Available Models	PHU30-M	PHU30-S	PHU30-SL	PHU30-Cxx
Max Link Distance*	300 m (660 ft)			
Wavelength	850nm	1310nm	1270/1330nm	CWDM grid
Required number of fibers	2	2	1	2
Optical Connector Type	LC Duplex	LC Duplex	LC Simplex	LC Duplex
Fiber Type	OM2 or OM3 MM	9/125 um SM		
Input Voltage	5V DC			
Typical Power Consumption	2W excluding USB bus powered devices			
Operating Temperature (standard version)	Case	0 ~ 65 °C		
	Ambient	0 ~ 50 °C		
Operating Temperature (industrial version)	Case	-40 ~ 80 °C		
	Ambient	-40 ~ 65 °C		
Storage Temperature	-40 ~ 85°C			
Dimensions (L x W x H) excluding mounting wings	72 x 38 x 22 mm 2.83 x 1.5 x 0.88 inches			
Weight	PC module: 53g ; RE module: 58g			



\* The link distances are estimated with 50/125um OM3 MM fiber and 9/125um SM fiber.

### Power Supply Specifications



AC Input	100 ~ 240V AC
DC Output	2.0 A @ 5V DC
DC Jack Polarity	Center 5V

## MECHANICAL INFORMATION (mm)[inch]

### RE Module

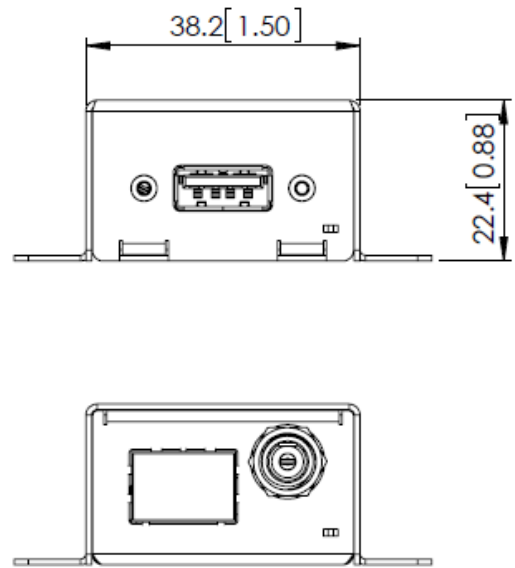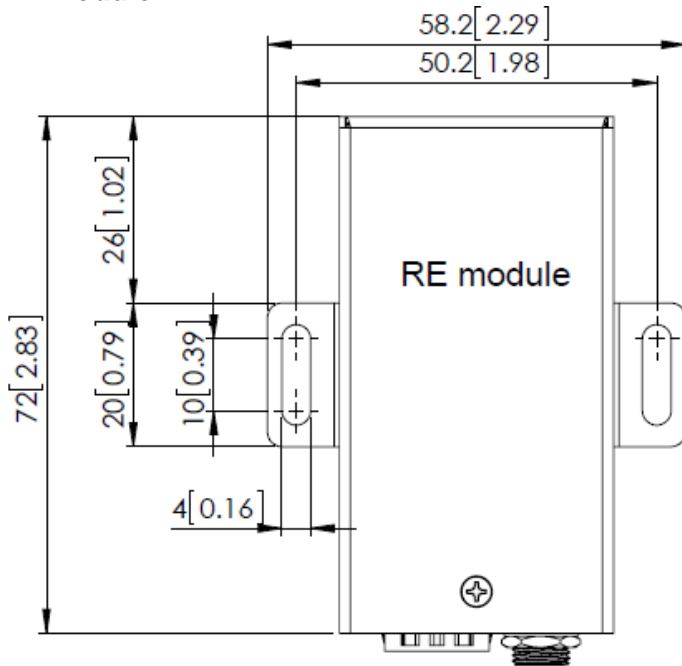

### PC Module

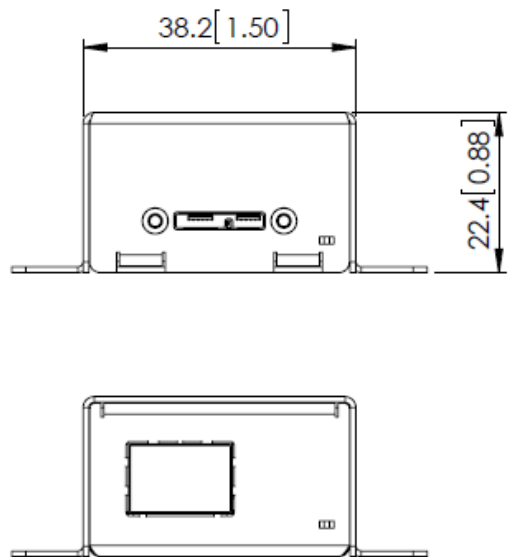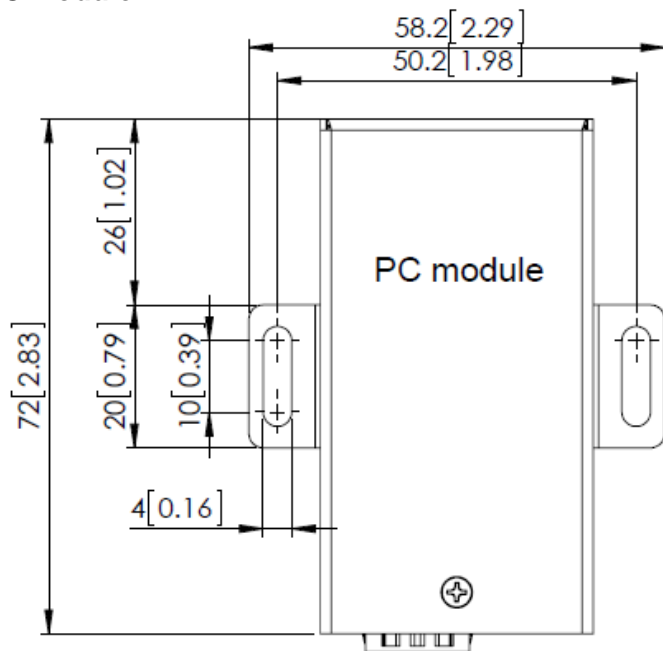

## ORDERING INFORMATION

### Standard models

Ordering Part #	Link Distance	Fiber type	Connector type	Items included
PHU30-M	300m	2x OM2 or OM3 MM fiber	LC duplex	1x PHU30-M-PC module 1x PHU30-M-RE module 1x 10W wall mount power supply
PHU30-S	300m	2x SM fiber	LC duplex	1x PHU30-S-PC module 1x PHU30-S-RE module 1x 10W wall mount power supply
PHU30-SL	300m	1x SM fiber	LC simplex	1x PHU30-SL-PC module 1x PHU30-SL-RE module 1x 10W wall mount power supply

### CWDM models (user needs to specify wavelength for both -PC and -RE device)

Ordering Part #	Tx Optical Wavelength	Rx Optical range	Connect or type	Items included
PHU30-C27-xx	1270 nm	1260 ~ 1620 nm	LC duplex	1x PHU30-Cxx-PC module 1x PHU30-Cxx-RE module 1x 10W wall mount power supply
PHU30-C29-xx	1290 nm			
PHU30-C31-xx	1310 nm			
PHU30-C33-xx	1330 nm			
PHU30-C35-xx	1350 nm			
PHU30-C37-xx	1370 nm			
PHU30-C39-xx	1390 nm			
PHU30-C41-xx	1410 nm			
PHU30-C43-xx	1430 nm			
PHU30-C45-xx	1450 nm			
PHU30-C47-xx	1470 nm			
PHU30-C49-xx	1490 nm			
PHU30-C51-xx	1510 nm			
PHU30-C53-xx	1530 nm			
PHU30-C55-xx	1550 nm			
PHU30-C57-xx	1570 nm			
PHU30-C59-xx	1590 nm			
PHU30-C61-xx	1610 nm			

## Accessory

Part #	Description
618-TRG10R-5V-SW	10W AC/DC adapter with 5V DC output



[www.phrontier-tech.com](http://www.phrontier-tech.com)

[sales@phrontier-tech.com](mailto:sales@phrontier-tech.com)

1-866-3892829